

# Rittal – The System.

Faster – better – everywhere.

## ▶ Second pair of mounting angles – DK 7298.000

Date : Aug 10, 2016

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



# Second pair of mounting angles – DK 7298.000

created: 10.08.2016 on [www.rittal.com/com-en](http://www.rittal.com/com-en)

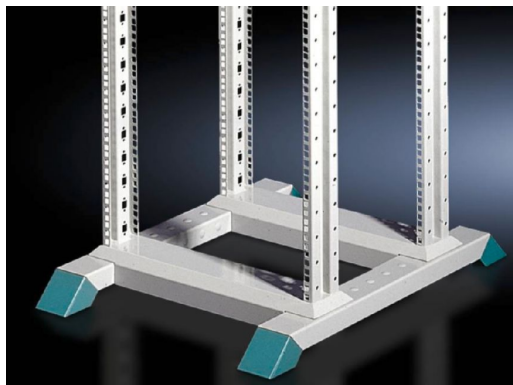

## Product description

**Description:** To accommodate 482.6 mm (19") network components or for the attachment of component shelves and slide rails. 482.6 mm (19") punched profile at the front, hole centre distance 465 mm (470 mm at the rear), tailored to the attachment of patch panels and cable routing rails. The mounting level may be positioned on a 50 mm pitch pattern. Minimum distance between levels 150 mm, maximum distance between levels 350 mm.

**Material:** Sheet steel, 2 mm

**Colour:** Profile frame: RAL 7035  
Trim panel: RAL 5018

**Supply includes:** Torsionally stiff profile frame  
Mounting accessories

**Packs of:** 1 pc(s).

**EAN:** 4028177128835

**Customs tariff number:** 94039010

**eCl@ss 5.1:** 27189207

**eCl@ss 7.0:** 27182590

**ETIM 6.0:** EC002620

## Product features

**Units:** 40 U

---

**Installation dimensions:** Installation width: 482,6 mm / 19"

---

**Weight/pack:** 13.33 kg

---

## Downloads

---

**CAD drawings:** Request

---