


Multifibre Micro Cable



Micro cable and double jacket/subgroup micro cable is ideal for indoor installations requiring a flexible, lightweight and reliable cable design where high fibre counts and small size is critical.

The high fibre counts and low cable diameter make micro cable the preferred cable for most enterprise level networks including MTP® and MPO and other preterminated networks. The compact construction limits cable congestion in populous networks.

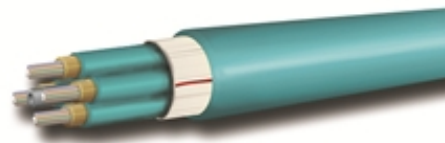

Available in a variety of fibre counts in single jacket or double jacket/subgrouped construction.

KEY FEATURES

- Compact construction and high fibre count suit populous networks
- High strength to weight ratio allows for easy handling and long term installation reliability
- Smaller and lighter than distribution style cable constructions
- Low smoke zero halogen emitting jacket – perfectly suited to data centre installations
- Wide operating temperature range of -20°C to +70°C
- Perfectly suited to MTP® backbone leads in cross connect networks
- Flexible cable construction allows for easy handling and management in enclosures
- Singlemode and multimode fibre variants available
- 12 to 144 fibre constructions

Application

- Data centre and enterprise networks
- Storage area networks – fibre channel
- Local area network backbone links
- Highly populated telecommunications exchanges.

Technical Specifications

Operating temp. (°C)	-20 to +70	
Storage temp. (°C)	-20 to +70	
Install temp. (°C)	-10 to +60	
Crush resistance (N/cm) installation	1,000 / 500	(double/single jacket)
Crush resistance (N/cm) long term	300 / 150	(double/single jacket)
Central strength member	PE upcoated FRP rod (excl. 12f)	
Peripheral member	Aramid yarn	

Cable Characteristics

Fibre Count	Nominal diameter (mm)	Nominal weight (kg/km)	Installation tensile load (N)	Operational tensile load (N)	Min. bend radius installation (cm)	Min. bend radius long term (cm)
12	3.0	8	150	80	6.0	3.0
12*	4.5	22	400	150	9.0	4.5
24	9.0	76	500	180	18.0	9.0
48	9.0	79	600	200	18.0	9.0
72	11.2	126	1000	300	22.4	11.2
96	13.5	178	1000	300	27.0	13.5
144	17.5	285	1000	300	35.0	17.5

*Double jacket with secondary aramid yarn strength member layer

NSW - Silverwater

Unit 4, 52 Holker Street
Silverwater NSW 2128

E: sales@opticalsolutions.com.au

P: +61 2 9395 1400

F: +61 2 9647 0014

NSW - Sydney City

Unit 10, 10 Bradford Street
Alexandria NSW 2015

E: sydcity@opticalsolutions.com.au

P: +61 2 9304 4555

F: +61 2 9700 8055

VIC

Unit 3 / 1 Rocklea Drive
Port Melbourne VIC 3207

E: vicsales@opticalsolutions.com.au

P: +61 3 9646 4166

F: +61 3 9646 4155

QLD

Unit 2/ 40 Borthwick Ave
Murarrie QLD 4172

E: qldsals@opticalsolutions.com.au

P: +61 7 3399 5280

F: +61 7 3399 9805

ACT

22 Isa Street
Fyshwick ACT 2609

E: actsales@opticalsolutions.com.au

P: +61 2 6162 4600

F: +61 2 6162 4605

WA

28a Teddington Rd
Burswood WA 6100

E: wasales@opticalsolutions.com.au

P: +61 8 9361 7000

F: +61 8 9361 7011