


Distribution Series Fibre Optic Cable



Distribution series cable is ideal for installations requiring a flexible, lightweight and reliable cable design where excellent mechanical and environmental protection remain necessary.

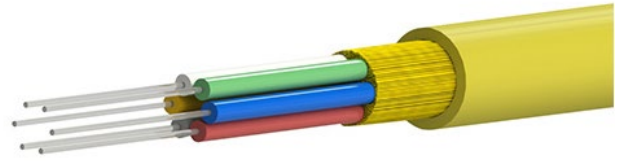

The balance between compact size and rugged construction make distribution the preferred cable for many preterminated cable assemblies or site terminated fibre networks

KEY FEATURES

- Low smoke, zero halogen jacket and materials
- High performance components and construction
- Complies with relevant ITU, IEC and UL codes, standards & specifications
- High strength to weight ratio allows for easy handling
- Aramid yarn strength member and all dielectric cable construction
- 900um buffer eliminates the need for costly and time consuming fanout kits or pigtail splices because connectors terminate directly to the fibre
- Cable materials are indoor/ outdoor – UV, water and fungus resistant
- Wide operating temperature range of -20°C to +70°C
- 2 to 24 fibres in single jacket construction
- 48 - 144 fibres in double jacket subgroup construction

Application

- Suitable for indoor/outdoor confined spaces
- Building risers
- Cable trays
- Central offices
- Campus networks



Fibre Performance

Fibre type	OM1	OM3 (G651)	OM4 (G651)	SM (G652.D)
Attenuation at 850nm (db/km)	≤3.5	≤3.0	≤3.0	n/a
Attenuation at 1300/1310nm (db/km)	≤1.5	≤1.0	≤1.0	≤0.40
Attenuation at 1550nm (db/km)	n/a	n/a	n/a	≤0.30
Bandwidth at 850nm (MHz.km)	≥200	≥1500	≥3500	n/a
Bandwidth at 1300nm (MHz.km)	≥500	≥500	≥500	n/a



Test to IEC 60793-1-40 (method C)

Technical Specifications

		SMF (1550nm)	MMF (1300nm)	
Temperature cycle	20 to -20 to 70 to 20 2 cycles, 8 hours	≤ 0.2	≤ 0.3	(IEC 60794-1-2-F1)
Tensile attenuation (Δ dB)	Installation & operational loads	≤ 0.2	≤ 0.3	(IEC 60794-1-2-E1)
Torsion resistance (Δ dB)	5 Cycles (± 180°) 30 N, 2m	≤ 0.2	≤ 0.3	(IEC 60794-1-2-E7)
Crush resistance (Δ dB)	1000 N/100mm, 5 min	≤ 0.2	≤ 0.3	(IEC 60794-1-2-E3)
Impact resistance (Δ dB)	10J, 3 points, 1 impact	≤ 0.2	≤ 0.3	(IEC 60794-1-2-E4)
Water penetration	1m head, 3m cable, 24 hours	Nil leakage of water		(IEC 60794-1-2-F5)
Flame retardant	As per IEC test	Pass	Pass	(IEC 60332-1)

Cable Characteristics

Fibre Count	Nominal diameter (mm)	Nominal weight (kg/km)	Installation tensile load (N)	Operational tensile load (N)	Min. bend radius (cm)
2	4.3	18	450	250	4.5
4	4.7	22	450	250	4.5
6	5.3	28	450	250	4.5
8	6.1	34	600	300	6.0
12	6.5	41	600	300	6.0
24	9.0	72	1000	500	10.0
48	16.4	211	2500	1000	16.4
72	19.6	313	3000	1500	19.6
96	22.9	443	3000	1500	22.9
144	26.0	476	3000	1500	26.0

NSW - Silverwater

Unit 4, 52 Holker Street
Silverwater NSW 2128

E: sales@opticalsolutions.com.au

P: +61 2 9395 1400

F: +61 2 9647 0014

NSW - Sydney City

Unit 10, 10 Bradford Street
Alexandria NSW 2015

E: sydcity@opticalsolutions.com.au

P: +61 2 9304 4555

F: +61 2 9700 8055

VIC

Unit 3 / 1 Rocklea Drive
Port Melbourne VIC 3207

E: vic-sales@opticalsolutions.com.au

P: +61 3 9646 4166

F: +61 3 9646 4155

QLD

Unit 2/ 40 Borthwick Ave
Murarrie QLD 4172

E: qlds-sales@opticalsolutions.com.au

P: +61 7 3399 5280

F: +61 7 3399 9805

ACT

22 Isa Street
Fyshwick ACT 2609

E: act-sales@opticalsolutions.com.au

P: +61 2 6162 4600

F: +61 2 6162 4605

WA

28a Teddington Rd
Burswood WA 6100

E: wasales@opticalsolutions.com.au

P: +61 8 9361 7000

F: +61 8 9361 7011