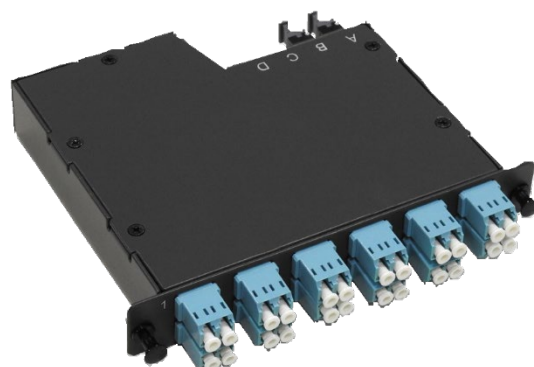


The CoreLink Plus range of MTP cassettes offer a seamless intergration path from existing traditional fibre infrastructure to a fully plug and play multibre system. Fully compatible with the range of CoreLink Plus enclosures, these cassettes can be paired with existing infrastructure, or installed in low density patching environments.



Combined with the full range of OSA MTP® cable options including flat and angle polish, OM1, OM3, OM4 & SM, single or double jacket, high fibre trunking and fanout assemblies, the CoreLink Plus MTP system offers an excellent solution for a wide range of networking requirements.

KEY FEATURES

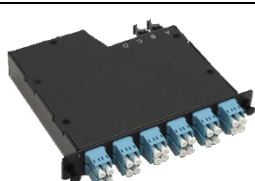
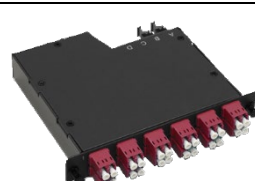

- Standard density 48 fibre capacity per 1 RU
- All CoreLink Plus enclosures, cassettes and cabling are compatible and require no management of specific cassette styles to match enclosure
- 12 or 24 fibre cassettes available with port labelling and simple latched installation
- Variants available to suit 12 or 24 fibre backbones
- All CoreLink Plus cassettes, fan- outs and trunks utilise US Conec brand MTP® elite* connectors and adapters
- Fibre management of incoming trunks and outgoing patchleads




Applications

- Data centre networks
- SAN, LAN and WAN networks
- Enterprise plug and play connectivity
- High fibre compact trunking
- Telecommunications exchange fibre networks
- Fibre to the antenna
- Cross connects & distribution frames



Technical Specifications

CoreLink Plus 2x12 Fibre MTP to LC Cassettes			
Part Number	OSA-CPC-24MTPMLCD-M3-B4	OSA-CPC-24MTPMLCD-M4-B4	OSA-CPC-24MTPMLCD-S-B4
Description	CPC MTP® Cassette: 2x12F Male MTP to LCD, OM3 - Method B4	CPC MTP® Cassette: 2x12F Male MTP to LCD, OM4 - Method B4	CPC MTP® Cassette: 2x12F Male MTP to LCD, SM - Method B4
Size WxHxD (mm)	159 x 27 x 144	159 x 27 x 144	159 x 27 x 144
Weight unit (kg)	0.5	0.5	0.5
Standard Cassette			

CoreLink Plus 24 Fibre MTP to LC Cassettes			
Part Number	OSA-HDX-24M24MLCD-M3-B4	OSA-HDX-24M24MLCD-M4-B4	OSA-HDX-24M24MLCD-S-B4
Description	HDX MTP® Cassette: 24F Male MTP to LCD, OM3 - Method B4	HDX MTP® Cassette: 24F Male MTP to LCD, OM4 - Method B4	HDX MTP® Cassette: 24F Male MTP to LCD, SM - Method B4
Size WxHxD (mm)	159 x 27 x 144	159 x 27 x 144	159 x 27 x 144
Weight unit (kg)	0.5	0.5	0.5
Standard Cassette			

NSW - Silverwater

Unit 4, 52 Holker Street
Silverwater NSW 2128

E: sales@opticalsolutions.com.au

P: +61 2 9395 1400

F: +61 2 9647 0014

NSW - Sydney City

Unit 10, 10 Bradford Street
Alexandria NSW 2015

E: sydcity@opticalsolutions.com.au

P: +61 2 9304 4555

F: +61 2 9700 8055

VIC

Unit 3 / 1 Rocklea Drive
Port Melbourne VIC 3207

E: vicsales@opticalsolutions.com.au

P: +61 3 9646 4166

F: +61 3 9646 4155

QLD

Unit 2/ 40 Borthwick Ave
Murarrie QLD 4172

E: qldsales@opticalsolutions.com.au

P: +61 7 3399 5280

F: +61 7 3399 9805

ACT

22 Isa Street
Fyshwick ACT 2609

E: actsales@opticalsolutions.com.au

P: +61 2 6162 4600

F: +61 2 6162 4605

WA

28a Teddington Rd
Burswood WA 6100

E: wasaes@opticalsolutions.com.au

P: +61 8 9361 7000

F: +61 8 9361 7011