

## Industrial Managed PoE Switch

# JetNet 5216G-4C4F/JetNet 5216GP-4F(-U)



Korenix JetNet 5216GP Series, the DIN-Rail type industrial Gigabit Managed PoE Switch. JetNet 5216GP is the first industrial ethernet switch compliance with IEEE 802.3af/at/bt, each ethernet port can max supports 90W for PD, and total budget up to 480W \*Note.

JetNet 5216GP series is designed for operating reliably under harsh environments, it supports one alarm relay to indicate fault conditions when any link or power failure happens, as a result, users can quickly handle the emergency and shorten the failover time. With IEC 61000-6-2 / 61000-6-4 Heavy Industrial EMC and Trackside certification design, including robust enclosure and -40-75°C wide operating temperature range, JetNet 5216GP series ensures high performance under traffic control systems and other Network applications.



Layer 2



Heavy Industrial



Wide Temp




EN50121-4

## Overview

- ▶ 8 10/100/1000 Base TX ports + 4G RJ45/SFP Combo + 4 Gigabit SFP (JetNet5216G-4C4F)
- ▶ 12 10/100/1000 Base TX ports + 4G SFP (JetNet5216GP-4F Series)
- ▶ SFP ports support Digital Diagnostic Monitoring (DDM)
- ▶ Compliance with IEEE 802.3af/at/bt, each port max 90W High Power PoE \*Note
- ▶ Total PoE Budget 480W \*Note, Flexible PoE ports setting
- ▶ Network Redundancy - MSR (Multiple Super Ring), ITU-T G.8032 ERPS V1/V2, RSTP, MSTP
- ▶ Fully Device Management - SNMP v1/v2c/v3, RMON, Web UI, Telnet and Local Console
- ▶ Friendly Device and Network Topology recovery utility - Korenix View, Korenix NMS
- ▶ Layer 2 Network Performance - IEEE802.1Q VLAN, Private VLAN, Trunk, Packet Filtering, DHCP Server/Client, Traffic Prioritize, Rate Control
- ▶ Advanced Security system by Port Security, Access IP list, SSH, HTTPS Login, TACACS+
- ▶ Event Notification through E-mail, SNMP trap and SysLog
- ▶ IEEE 802.1AB LLDP and optional Korenix NMS software for auto-topology and group management
- ▶ Cisco-Like CLI, Web, SNMP/RMON for network management
- ▶ Multiple event relay output for enhanced device alarm control
- ▶ Hi-Pot Isolation Protection for ports and power
- ▶ Railway Track Side EN50121-4 Certification
- ▶ -40-75°C Wide Operating Temperature

## Dimension:

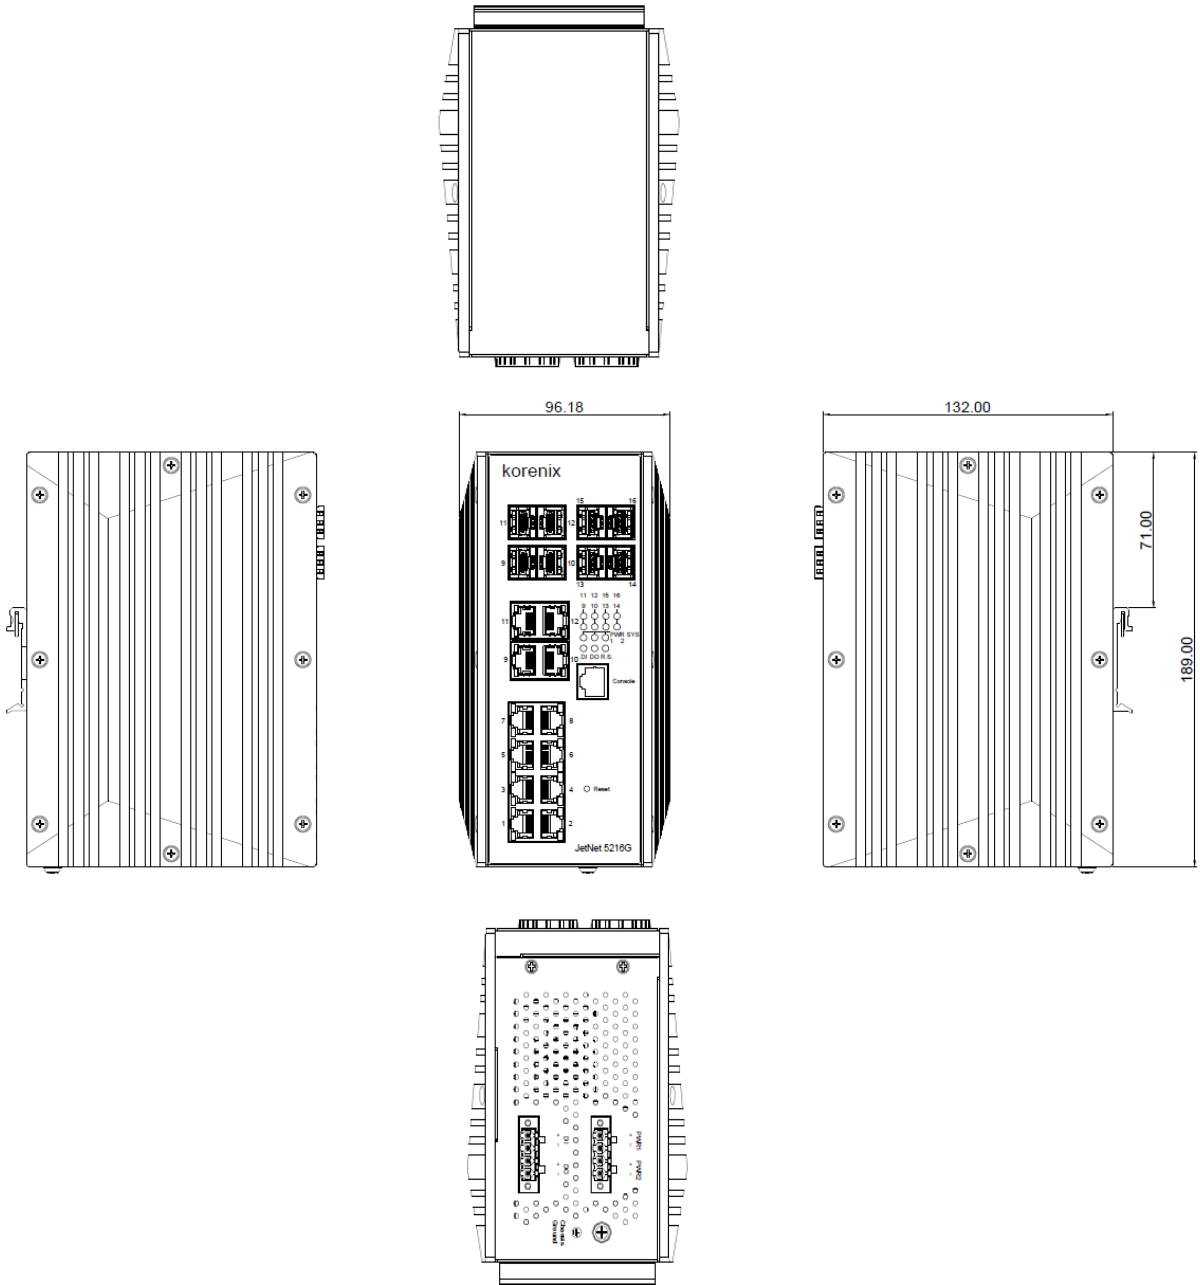

## Specification

### Technology

|                |  |
|----------------|--|
| IEEE Standards | <ul style="list-style-type: none"> <li>IEEE 802.3 10 Base-T Ethernet</li> <li>IEEE 802.3u 100 Base-TX Fast Ethernet</li> <li>IEEE 802.3u 100 Base-FX Fast Ethernet Fiber</li> <li>IEEE 802.3ab 1000 Base-T</li> <li>IEEE 802.3z Gigabit Fiber</li> <li>IEEE 802.3x Flow Control and Back-pressure</li> <li>IEEE 802.1AB Link Layer Discovery Protocol (LLDP)</li> <li>IEEE 802.1p Class of Service (CoS)</li> <li>IEEE 802.1Q VLAN and GVRP</li> <li>IEEE 802.1 QinQ</li> <li>IEEE 802.1D-2004 Rapid Spanning Tree Protocol (RSTP)</li> <li>IEEE 802.1s Multiple Spanning Tree Protocol (MSTP)</li> <li>IEEE 802.3ad Link Aggregation Control Protocol (LACP)</li> <li>IEEE 802.1x Port Based Network Access Protocol</li> <li>IEEE 802.3af/at/bt Power over Ethernet</li> </ul> |
|----------------|--|

# Specification

| Performance   |   |
|---|---|
| Switch Technology                                   | Store and Forward Technology with 16 Gbps Switch Fabric   |
| System Throughput                                   | 29.7Mega packet per second  |
| CPU performance                                     | MIPS-4KEc CPU running at 500 MHz  |
| System Memory                                       | 32M Bytes flash ROM, 256M Bytes DDR3 SDRAM  |
| Transfer packet size                                | 64 bytes to 10K bytes Jumbo Frame   |
| MAC Address   | 8K MAC address table  |
| Packet Buffer                                       | 4.1Mbit SRAM packet memory  |
| Forwarding performance                              | 14,880 pps for Ethernet and 148,800 pps for Fast Ethernet, 1488,100 pps for Gigabit Ethernet  |
| Interface   |   |
| Enclosure Port                                      | <ul style="list-style-type: none"> <li>10/100/1000 Mbps Ethernet port:               <ul style="list-style-type: none"> <li>12 x RJ-45 (JetNet5216G-4C4F)</li> <li>12 x RJ-45 (JetNet5216GP-4F)</li> </ul> </li> <li>100Mbps / 1000Mbps Fiber port :               <ul style="list-style-type: none"> <li>8 x SFP (JetNet5216G-4C4F)</li> <li>4 x SFP (JetNet5216GP-4F)</li> </ul> </li> <li>Socket for SFP fiber transceiver with Hot-swappable and D.D.M. functions</li> <li>RS-232 Console port : 1 x RJ-45 for system configuration</li> <li>Digital Input / Relay Output port: 4-Pin removable terminal block connector</li> <li>Power input port: 4-Pin removable terminal block connector</li> </ul> |
| Ethernet Cable                                      | 100 Base-TX: 2-pair UTP/STP Cat. 6 cable, EIA/TIA-568B 100-ohm (100m)<br>1000 Base-TX: 4-pair UTP/STP Cat. 6 cable, EIA/TIA-568B 100-ohm (100m)   |
| Digital Input                                       | Digital Input (Hi): DC 11V-30V<br>Digital Input (Low): DC 0V-10V<br>Supports sink type signal input with photo-coupler isolation  |
| Relay Output  | Dry Relay output: 1A / DC 24V<br>Supports Multiple Events Binding trigger function.   |
| Diagnostic Indicators                               | <ul style="list-style-type: none"> <li>RJ-45 port: Link / Activity (Green on, Green Blinking), 1000Mbps (Yellow)</li> <li>SFP port: Link/Activity (Green on, Green Blinking)</li> <li>Power: System Power ready (Green on)</li> <li>Sys: System Ready (Green on), System Updating (Green Blinking)</li> <li>DO (Alarm): Alarm Relay Active (Red On)</li> <li>R.S.: Green on (Ring normal)/Blinking (wrong ring port connective), Amber on (Ring abnormal) / Blinking (device's ring port failed)</li> <li>PoE: Green On (PD Detect/On), Off (None-Detect/Off)</li> </ul>  |
| Power over Ethernet (For JetNet 5216GP-4F(-U) only) |   |
| Standard  | IEEE 802.3af, IEEE 802.3at, IEEE 802.3bt  |
| PoE operating mode                                  | Auto Mode: IEEE 802.3af/at/bt <sup>*Note</sup><br>Forced Mode: User configured Power consumption budget control with IEEE 802.3 PoE /PD detection, or forced without PD detection   |
| PoE forwarding conductor                            | IEEE 802.3 af/at: RJ-45: V+(3,6), V- (1,2)<br>IEEE 802.3 bt: RJ-45: V+(3,4,5,6), V- (1,2,7,8) <sup>*Note</sup>  |
| Power forwarding capability                         | 12 port PoE (#1-12)<br>PoE Port: 15W/IEEE802.3af, 30W/IEEE 802.3at, 60W-90W/IEEE 802.3bt <sup>*Note</sup>   |
| PoE System Power Budget                             | Port-based system power budget control with first plug-in high priority mechanism<br>PoE System Power Budget: 480Watts. <sup>*Note</sup>  |

| Management                 |   |
|----------------------------|---|
| Telnet & Local Console     | Supports command line interface with Cisco-like commands and maximum 4 sessions; the telnet interface also supports SSH   |
| SNMP                       | Support IPv4/IPv6, v1, v2c, v3 with SNMP trap function, trap station up to 4 and can be manually configured the trap server IP address.   |
| SNMP MIB                   | MIBII, Bridge MIB, Ethernet-like MIB, VLAN MIB, IGMP MIB, Korenix Private MIB   |
| Korenix Utility            | Supports Korenix View and Korenix NMS with IEEE 802.1AB Link Layer Discovery Protocol for device and link auto-topology discovery   |
| Network Time Protocol      | Supports NTP protocol with daylight saving function and localized time sync function.   |
| Management IP Security     | IP address security to prevent unauthorized access  |
| 1588 PTP                   | IEEE 1588 Precision Time Protocol v1/v2 with Time Transparent   |
| E-mail Warning             | 4 receipt E-mail accounts with mail server authentication   |
| System Log                 | Supports both Local or remote Server with authentication  |
| IEEE 802.1x                | Port based network access control, RADIUS, MAB, TACACS+   |
| Network Redundancy         |   |
| Multiple Super Ring (MSR™) | New generation Korenix Ring Redundancy Technology, Includes Rapid Super Ring, Rapid Dual Homing, TrunkRing™, MultiRing™, SuperChain™ and backward compatible with legacy Super Ring™.                       |
| Rapid Dual Homing (RDH™)   | Multiple uplink paths to one or multiple upper switch   |
| TrunkRing™                 | Integrates port aggregation function in ring path to get higher throughput ring architecture  |
| MultiRing™                 | Couple or multiple rings; Up to 8 rings in single switch  |
| SuperChain™                | It is new ring technology with flexible and scalability, compatibility, and easy configurable. The ring includes 2 types of node Switch - Border Switch and Member Switch                                   |
| ITU-T G.8032 ERPS          | Support ITU-T G.8032 ERPS V1 single ring topology, and ERPS V2 multiple rings with ladder topology  |
| Rapid Spanning Tree        | IEEE802.1D-2004 Rapid Spanning Tree Protocol. Compatible with Legacy Spanning Tree and IEEE 802.1w multiple spanning tree   |
| Loop Protection            | The Loop Protection prevents any network looping caused by RSTP and MSR ring topology change  |
| Network Performance        |   |
| Port Configuration         | Port link Speed, Link mode, current status and enable/disable   |
| Port Trunk                 | IEEE 802.3ad port aggregation and static port trunk; trunk member up to 8 ports and maximum 8 trunk groups  |
| VLAN                       | IEEE 802.1Q Tag VLAN with 256 VLAN Entries and provides 2K GVRP entries<br>3 VLAN link modes- Trunk, Hybrid and Link access   |
| Private VLAN               | Direct client ports in isolated/community VLAN to promiscuous port in primary VLAN  |
| IEEE802.1 QinQ             | Supports Double VLAN Tag function for implementing Metro Network topologies   |
| Class of Service           | IEEE 802.1p class of service; per port 4 priority queues.   |
| Traffic Prioritize         | Supports 4 physical queues, weighted fair queuing (W.R.R.) and Strict Priority scheme, which follows 802.1p CoS tag and IPv4 ToS/ DiffServ information to prioritize the traffic of your industrial network |
| IGMP Snooping              | IGMP Snooping v1/v2/v3 for multicast filtering and IGMP Query mode; also support unknown multicasting process forwarding policies- drop, flooding and forward to router port                                |
| Rate Control               | Ingress/Egress filtering for Broadcast, Multicast, Unknown DA or All packets  |
| Port Mirroring             | Online traffic monitoring on multiple selected ports  |
| Port Security              | Port security to assign authorized MAC to specific port   |
| DHCP                       | DHCP Client, DHCP Server with IP & MAC Address binding, DHCP relay and port based DHCP server   |

| Mechanical            |  |
|-----------------------|--|
| Installation          | DIN-Rail mounting  |
| Case                  | Steel metal with Aluminum heat-dissipate panel housing   |
| Ingress Protection    | IP31   |
| Dimension (mm)        | 96 (W) x 132(D) x 189 (H) - w/o DIN Rail Clip  |
| Installation          | DIN-rail mounting  |
| Weight                | 1.5 Kg   |
| Power Requirement     |  |
| System power          | 2x DC power input with polarity reverse protection   |
| Input Range           | DC 10-60V (JetNet 5216G-4C4F)<br>DC 48-57V (JetNet 5216GP-4F)<br>DC 50-57V (JetNet 5216GP-4F-U)  |
| Power system type     | Passive power system   |
| Power Consumption     | PoE 480W@48V; 480W@50V <sup>*Note</sup>  |
| Environmental         |  |
| Operating Temperature | -40 ~75°C  |
| Operating Humidity    | 0% ~ 95%, non-condensing   |
| Storage Temperature   | -40 ~ 85°C, 0% ~90% Humidity   |
| Hi-Pot                | AC 1.5KV for Ethernet port and power   |
| Regulatory Approvals  |  |
| EMC                   | IEC/EN61000-6-2, IEC/EN61000-6-4 Heavy Industrial EMC<br>EMI: FCC Class A, CE/ Class A<br>EMS: IEC/EN61000-4-2, IEC/EN61000-4-3, IEC/EN61000-4-4, IEC/EN61000-4-5,<br>IEC/EN61000-4-6, IEC/EN61000-4-8 |
| Railway Application   | EN50121-4  |
| Power Station         | IEEE1613, IEC 61850-3 Compliance <sup>*by request</sup>  |
| Shock                 | Compliance with IEC 60068-2-27   |
| Vibration             | Compliance with IEC 60068-2-6  |
| Free Fall             | Compliance with IEC 60068-2-32   |
| Warranty              | 5 years  |

**\*Note:**

Please note that only the model with “U” supporting IEEE 802.3bt, and with 480W power budget. Kindly refer below order information for more details.

## Ordering Information

| Model Name         | Description  |
|--------------------|--|
| JetNet 5216G-4C4F  | Industrial 8G RJ45 + 4G Combo + 4G SFP Managed Ethernet Switch, -40~75°C   |
| JetNet 5216GP-4F   | Industrial 12G RJ45 + 4G SFP Managed PoE Switch with 360W Power Budget, -40~75°C   |
| JetNet 5216GP-4F-U | Industrial 12G RJ45 + 4G SFP Managed PoE Switch with 480W Power Budget, IEEE802.3af/at/bt,-40~75°C   |
| Package            | Includes: <ul style="list-style-type: none"> <li>• JetNet 5216G Series</li> <li>• DIN-Rail kit</li> <li>• Quick Installation Guide</li> </ul> Note: Please download User Manual from Korenix website |