

Under Vehicle Inspection Camera

OSA-UVIC




PRODUCT DESCRIPTION:

The OSA Under Vehicle Inspection Camera is designed to allow easy and simple visualisation of the undercarriage of all vehicle types due to the design meeting the Australian standards for speed bumps.

It is available as a single section as shown below for vehicles to drive over. Additional blank sections can be added to turn the OSA-UVIC into a standard full width speed bump.

KEY FEATURES:

- Designed for all types of vehicles
- Comes with all fixings
- Safety Yellow markings for high visibility
- Single Cable PoE+ for simple installation
- Works 24 hours a day
- Works reliability with head and fog lights
- Easy to install
- High quality steel construction

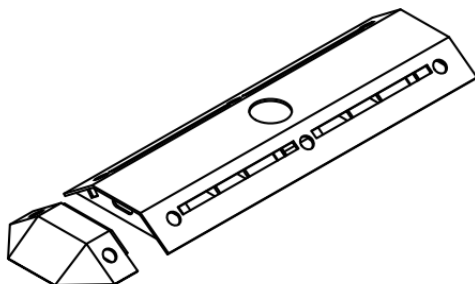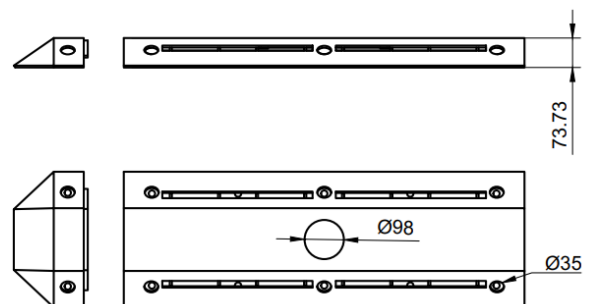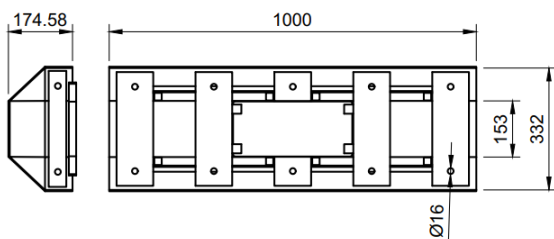

Under Vehicle Inspection Camera

OSA-UVIC

TECHNICAL SPECIFICATION:

Camera		Network	
Effective Pixels	2048 x 2048 (HxV)	Physical Interface	RJ45, 10BASE-T/100BASE-TX
Minimum Illumination	0 Lux	Video Compression	H.264 (MPEG-4 Part 10/AVC) / MJPEG
Shutter Speed	2 to 1/100000 s	Video Streaming	H.264/MJPEG 4.2MP@25FPS
Lens	Fisheye, F2.0, Horizontal field of view: 185°	Security/Authorisation	HTTPS/IP Filter/IEEE 802.1X
Image		Alarm	Input: 1, supervised
White Balance	Configurable	Storage	microSDHC Support
Noise Reduction	Low noise or Low motion blur	Supported Web Browser	All
Wide Dynamic Range	True Shutter WDR	Mechanical	
Privacy Mask	Configurable	Built-in Illuminator	4 LED Strips @ 6000K (white light), motion activated.
Brightness	Configurable	Connectors	IP68 RJ45 Connector
Exposure	Auto/Manual		
Sharpness	Configurable		
Contrast	Configurable		
Saturation	Configurable		
General			
Operating Temperature	-40°C ~ 50°C		
Operating Humidity	10% ~ 100% Condensing		
Weather Proof	IP66		
Impact Resistant	IK10		
Dimensions	1000mm (1349mm with end caps) Long x 332mm Wide x 74mm High		
Weight	30 kg		
Power Source	PoE 802.3at		
Power Consumption	18W Peak		

Product specification and availability are subject to change without notice.