

Rittal – The System.

Faster – better – everywhere.

▶ Second pair of mounting angles – DK 7296.000

Date : Aug 10, 2016

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



Second pair of mounting angles – DK 7296.000

created: 10.08.2016 on www.rittal.com/com-en

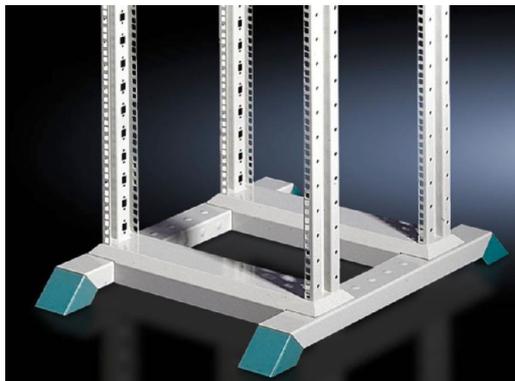

Product description

Description: To accommodate 482.6 mm (19") network components or for the attachment of component shelves and slide rails. 482.6 mm (19") punched profile at the front, hole centre distance 465 mm (470 mm at the rear), tailored to the attachment of patch panels and cable routing rails. The mounting level may be positioned on a 50 mm pitch pattern. Minimum distance between levels 150 mm, maximum distance between levels 350 mm.

Material: Sheet steel, 2 mm

Colour: Profile frame: RAL 7035
Trim panel: RAL 5018

Supply includes: Torsionally stiff profile frame
Mounting accessories

Packs of: 1 pc(s).

EAN: 4028177128798

Customs tariff number: 94039010

eCl@ss 5.1: 27189207

eCl@ss 7.0: 27182590

ETIM 6.0: EC002620

Product features

Units: 31 U

Installation dimensions: Installation width: 482,6 mm / 19"

Weight/pack: 11.68 kg

Downloads

CAD drawings: Request
