Rittal - The System.

Faster – better – everywhere.

► Earth rail, vertical for TS – DK 7545.000


Date: Aug 11, 2016



NCLOSURES POWER DISTRIBUTION CLIMATE CONTROL IT INFRASTRUCTURE SOFTWARE & SERVICES

Earth rail, vertical for TS – DK 7545.000

created: 11.08.2016 on www.rittal.com/com-en

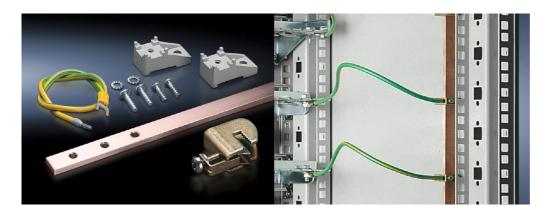

| D 1 1 | | |
|--------------|-------------|---|
| Product | description | n |
| | accor iptic | |

Description: Easily fitted to the 25 mm DIN pitch pattern of distributors or to the 482.6 mm (19") mounting

angles. The supplied earth conductors facilitate star earthing of the cable clamp straps in the patch panels. The earth terminals are fully adjustable. Current carrying capacity of rail approx.

200 A.

Supply includes: Earth rail made from E-Cu 57 to DIN EN 12 163, DIN EN 13 601, 15 x 5 mm

16 conductor connection clamps 2.5 – 16 mm²

15 earthing leads 6 mm², L = 500 mm

Assembly parts

Packs of: 1 pc(s).

EAN: 4028177131873

Customs tariff number:

74199990

eCl@ss 5.1: 27189215

eCl@ss 7.0: 27149205

ETIM 6.0: EC000329

Product features

To fit: Enclosure type: TS

Height: = 1600 mm

Dimensions: Length: 1345 mm

© Rittal 2016

| Weight/pack: | 2.31 kg |
|----------------|-----------------------|
| Downloads | |
| Documentation: | ™ Info sheet (EN, DE) |
| CAD drawings: | Request |

© Rittal 2016 2