


FLEXTUBE®

Duct dielectric optical FlexTube® cable

IEC 60794
ACMA - AS/CA S008

Cable Design

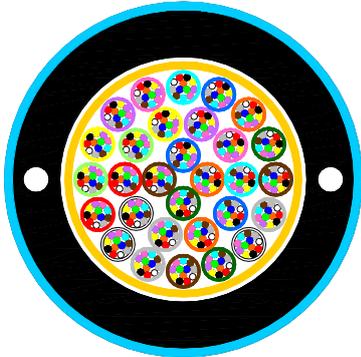

- Drawing not to scale -

- **Micro-module:** Thin wall tubing filled with a suitable compound, housing the single-mode optical fibres
- **Longitudinal water tightness:** Water swellable elements (dry-core)
- **Strength members:** Aramid Yarns. Glass fibre reinforced plastic material embedded in sheath
- **Sheath:** Polyethylene in compliance with AS 1049
- **Outer jacket:** UV stabilised polyamide (Nylon) in compliance with AS 1049 integrally bonded to PE sheath

This thin wall FlexTube® dielectric optical cable is designed for outdoor installation in ducts. Polyamide provides anti-termite protection. The FlexTube® design provides easier storage & faster installation. Finger access to the fibres: No specific tools to open the FlexTube®.

Technical data

Number of Fibres (12F groups)		144	288	360
Module diameter	mm		1.3	
Cable nominal diameter	mm	10.0	12.7	13.6
Cable nominal weight	kg/km	70	115	135
Max. installation tension	kN	1.0	2.5	2.7
Max. crush resistance	kN/100 mm	1.5 (Short term)		2.0 (Short term)
Min. bending radius	mm	At full load 20 x OD At no load 15 x OD		At full load 20 x OD At no load 10 x OD
Temperature range	°C	Installation -0 -> +50	Transport & Storage -20 -> +70	Operation -10 -> +70

Optical Characteristics

See the attached cabled optical fibre data sheet: G652D C03 or BendBright-XS C24

Identification

Fibre Colours

No.	1	2	3	4	5	6	7	8	9	10	11	12
Colour	blue	orange	green	brown	grey	white	red	black	yellow	violet	pink	aqua

Module colours for cables up to 144 fibres (≤12 modules)

No.	1	2	3	4	5	6	7	8	9	10	11	12
Colour	blue	orange	green	brown	grey	white	red	light green	yellow	violet	pink	aqua

Module Colours for cables with more than 144 fibres (>12 modules)

No.	1	2	3	4	5	6	7	8	9	10	11	12
Colour	blue	orange	green	brown	grey	white	red	light green	yellow	violet	pink	aqua
No.	13	14	15	16	17	18	19	20	21	22	23	24
Colour	blue	orange	green	brown	grey	white	red	light green	yellow	violet	pink	aqua
No.	25	26	27	28	29	30						
Colour	blue	orange	green	brown	grey	white						

Sheath Colour:

The outer sheath colour is blue.

Sheath Marking:

The outer sheath is distinctly marked in 1 metre intervals as follows:

PRYSMIAN DW FLEXTUBE Part Number T/N #### MM/YY MADE IN AUSTRALIA ***** >> | << *****

^ Customised marking legend is available (subject to agreement)

Main mechanical characteristics

Parameter	Test method	Test conditions	Acceptance criteria*
Tensile strength	IEC 60794-1-21-E1 Figure 2	Load: As per cable maximum tension stated in technical data table	After 10 minutes the maximum strain on the fibre should not exceed 0.6% and no attenuation change throughout test
Crush	IEC 60794-1-21-E3	Short time: 10 min Load: As per maximum crush resistance stated in technical data table Number of positions: 3 adjacent sections	No damage to the sheath or to the core structure and no attenuation change throughout test
Torsion	IEC 60794-1-21-E7	Sample length: 1 m Rotation: a) 180° clockwise, b) return to starting position, c) 180° anticlockwise, d) return to starting position. Four movements constitute one cycle. Complete 10 cycles (a to d) in one minute maximum	During the final tenth cycle at a), c) and after completion (no rotation) check transmitting fibres. No fibre breaks, no damage to the sheath or to the core structure and no attenuation change throughout test
Bend	IEC 60794-1-21-E11	Mandrel radius: As per Min. bending radius at no load stated in technical data table Bend: 360° (5turn)	No attenuation change throughout test
Bend under tension	Concurrent to tensile test IEC 60794-1-21-E18A	Mandrel radius: As per Min. bending radius at full load state in technical data table Bend: 360° (1turn)	After 1minute no fibre breaks, no damage to the sheath or to the core structure and no attenuation change throughout test
Temperature cycling	IEC 60794-1-22-F1	Sample length: 1000 m (minimum) Temperature range: -10°C to +70°C	There should be no average attenuation increase at the temperature extremes when compared to the attenuation at ambient temperature. No individual fibre should measure an attenuation greater than 0.15 dB/km
Water penetration	IEC 60794-1-22-F5C	Sample length=3m, Water height=1m	No water leakage after 24 hour

* All optical measurements for singlemode fibres performed at 1550 nm.

Logistic

Packing:

Timber drums to AS/NZS 2857 with NOLCO-FLEX protection

Delivery Lengths:

Standard delivery length is 5 km with a tolerance of - 1% / + 3%

© PrysmianGroup 2012, All Rights Reserved

All sizes and values without tolerances are reference values. Specifications are for product as supplied by PrysmianGroup: any modification or alteration afterwards of product may give different result.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of PrysmianGroup. The information is believed to be correct at the time of issue. PrysmianGroup reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorised by PrysmianGroup.