

OSA Fibre optic pigtails offer a convenient method of fibre cable termination. Each individual fibre comes factory terminated with a machine polished, factory tested connector.

OSA manufactures and supplies a broad range of pigtails in a variety of connector styles, pack sizes and fibre modes. All pigtails are factory tested and guaranteed.



KEY FEATURES

- Prepackaged in specially made blister packaging, ensuring terminations remain undamaged and untangled during transit (some exclusions apply)
- Easy to strip tight buffer lowers fibre damage or breakage during installation
- Standards based testing and insertion/return loss ensures guaranteed results
- Geometry compliant precision connectors ensure repeatable low loss results
- Variety of connector types, pack sizes and fibre modes available to match your fibre network
- Standards compliant fibre buffer
- All packages come supplied with test results for each individual fibre termination
- Low smoke zero halogen buffer ensures pigtails are suitable for a range of indoor environments
- RoHS compliant

Applications

- All networks including Ethernet, Fast Ethernet, GbE & beyond
- Ideal for a wide range of telecom, datacom, process control and infrastructure networks
- Suitable for repeat handling in enclosures
- CATv, FTTx and MDU networks




Technical Specifications

SC, SCA, LC, LCA, ST, FC

Fibre Mode	OM1	OM3	OM4	OS1/2
Core/Cladding (um)	62.5/125	50/125	50/125	9/125
Fibre Conformance	TIA/EIA 492AAAA	ITU G651.1	ITU G651.1	ITU G652.D
Insertion Loss (max dB)	0.30	0.30	0.30	0.25
Insertion Loss (avg dB)	0.15	0.15	0.15	0.18
Insertion Loss (random)	0.20	0.20	0.20	0.18
Return Loss (dB)	N/A	N/A	N/A	APC: >60 PC: >50
Crush (N/100mm ²)	500			
Max Tensile Load (N)	6			
Pack Sizes (fibres)	6, 12			
Jacket Diameter (mm)	0.9 Standard (2, 3 available)			
Jacket Material	Low Smoke Zero Halogen			
Operating Temp (°C)	-20 to +60			

Applicable Standards

Insertion Losss	All SC, SCA, LC, LCA, ST, FC pigtails comply with the loss requirements of ISO/IEC 61300- 3-4, ISO/IEC 61300- 3-34 & AS/NZS ISO/IEC 14763.3
Return Loss	All singlemode pigtails comply with the return loss requirements set out in ISO/IEC 61300-3-6
Colour Coding	All pigtails comply with TIA-598C & AS/CA S008:2010 colour code requirements
Cable Attenuation	Cable attenuation falls below levels specified in AS/NZS 3080
Testing	All testing is completed with reference grade patch leads and precision zirconia sleeve adapters and meet all requirements for testing in AS/NZS ISO/IEC 14763.3
Fibre Standards	Singlemode pigtails meet ITU 652.D guidelines and TIA/EIA 492 CAAA OM3 & OM4 pigtails meet ITU 651.1 guidelines and conform to TIA/EIA 492 AAAB OM1 multimode pigtails meet requirements set out in TIA/EIA 492 AAAA

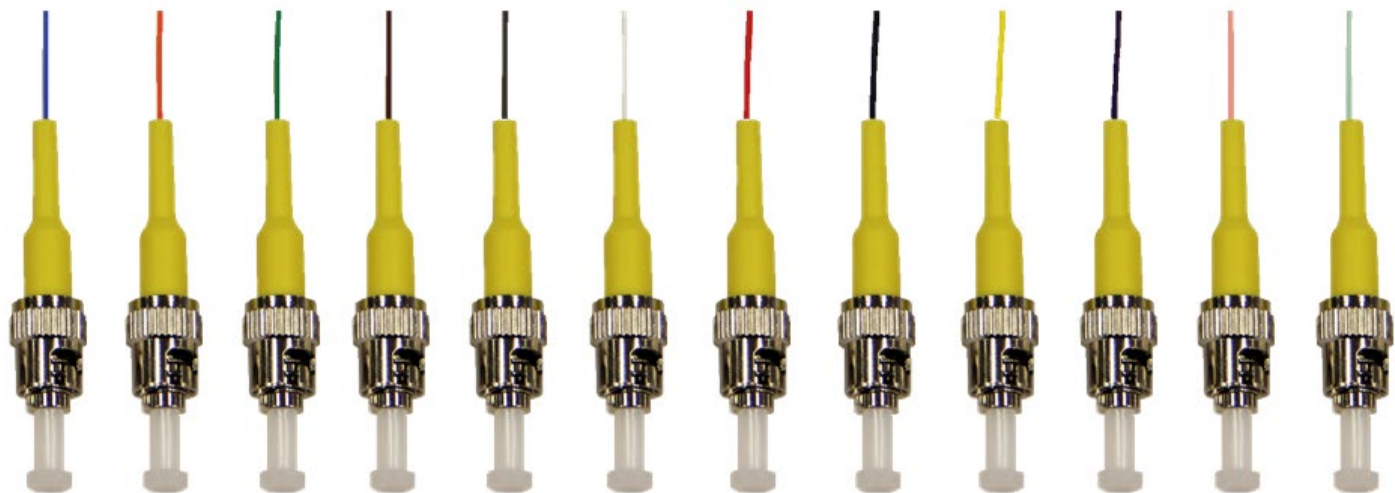

P M4 - SC 2M - 12 (- 2 C)

Pigtail	Cable Mode	Connectors	Length (m)	Fibre Count	Cable Diam.	Colour	
S:	OS1/2	SC: SC/UPC	2M: 2m	06: 6 Fibres	9: 900um	C:	12 Colour (TIA 598C)
M1:	OM1	SCA: SC/APC		12: 12 Fibres	2: 2.0mm	AQ:	Aqua
M3:	OM3	LC: LC/UPC	Custom lengths available by special order		3: 3.0mm	BU:	Blue
M4:	OM4	LCA: LC/APC				OG:	Orange
		ST: ST/UPC				BK:	Black
		FC: FC/UPC				RD:	Red
		E2K: E2000/APC				YL:	Yellow
						GN:	Green
						VT:	Violet
						PL:	Purple
						PK:	Pink

NSW - Silverwater
Unit 4, 52 Holker Street
Silverwater NSW 2128
E: sales@opticalsolutions.com.au
P: +61 2 9395 1400
F: +61 2 9647 0014

NSW - Sydney City
Unit 10, 10 Bradford Street
Alexandria NSW 2015
E: sydcity@opticalsolutions.com.au
P: +61 2 9304 4555
F: +61 2 9700 8055

VIC
Unit 3 / 1 Rocklea Drive
Port Melbourne VIC 3207
E: vicsales@opticalsolutions.com.au
P: +61 3 9646 4166
F: +61 3 9646 4155

QLD
Unit 2/ 40 Borthwick Ave
Murarrie QLD 4172
E: qldsals@opticalsolutions.com.au
P: +61 7 3399 5280
F: +61 7 3399 9805

ACT
22 Isa Street
Fyshwick ACT 2609
E: actsales@opticalsolutions.com.au
P: +61 2 6162 4600
F: +61 2 6162 4605

WA
28a Teddington Rd
Burswood WA 6100
E: wasaes@opticalsolutions.com.au
P: +61 8 9361 7000
F: +61 8 9361 7011