


External Underground Loose tube Optical Cable OSA-FSM(2-144)LTNRP

OSA loose tube dielectric optical cable is designed for external underground installations in ducts or by direct burial. GRP armour provides rodent protection and polyamide provides anti-termite protection

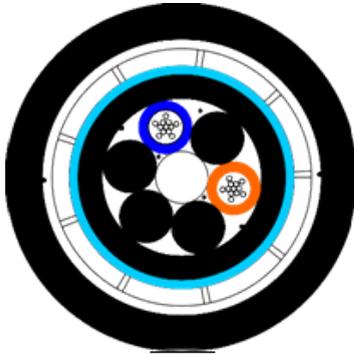

CABLE DESIGN

- **Multi-loose tube construction** – Single layer 2 to 144 fibres
- **Central strength member (CSM):** Glass fibre reinforced plastic material (GRP) with or without over-sheathing
- **Tube:** Thermoplastic material, containing up to 12 optical fibres filled with a low viscosity, thixotropic, non-melting gelfuly compatible with fibre coating and tube material
- **Stranding:** The required numbers of elements (tubes and filers) are SZ stranded around the central strength member
- **Longitudinal water tightness:** Water swelable elements (dry-core)
- **Inner Sheath:** Polyethylene in compliance with AS 1049
- **Hard Jacket:** UV stabilised polyamide (Nylon) in compliance with AS 1049 integrally bonded to PE inner sheath
- **Armour:** Flat GRP Rods
- **Outdoor Jacket:** UV stabilised polyethylene in compliance with AS 1049. Two ripcords provided beneath the sheath for easy removal

Technical Specifications

Number of Fibres		2 to 72	84 – 96	108 – 120	132 – 144
Number of elements		6	8	10	12
Tube / Filler diameter	mm	2.1			
Cable nominal diameter	mm	13.8	15.5	17.4	18.4
Cable nominal weight	kg/km	165	210	265	300
Max. installation tension	kN	4.0			
Max. crush resistance	kN/100mm	4.0 (Short term) / 2.0 (Long term)			
Min. bending radius	mm	At full load 30 x Cable OD At no load 15 x Cable OD			
Temperature range	°C	Installation -0->+50	Transport & Storage -20->+70	Operation -10->+70	

Optical Characteristics

See the attached cabled optical fibre data sheet.

Identifications

Fibre and Buffer Tube Colours

No.	1	2	3	4	5	6	7	8	9	10	11	12
Colour	blue	orange	green	brown	grey	white	red	black	yellow	violet	pink	Aqua

Fillers are either natural (opaque) or black, jelly filled tubes (with no fibres) are also used.

Sheath Colour:

The outer sheath colour is black. Other colours are available upon request.

Sheath Marking:

The outer sheath is marked in 1 metre intervals as follows:

Main Mechanical Characteristics

Parameter	Test method	Test conditions	Acceptance criteria*
Tensile strength	IEC 60794-1-21-E1 Figure 2	Load: As per cable maximum tensile strength in table above.	After 30 minutes the maximum strain on the fibre should not exceed 0.6% and no attenuation change throughout test
Crush	IEC 60794-1-21-E3	Short time: 10 min Long time: 120 min Load: As per maximum crush resistance in table above Number of positions: 3 adjacent sections (ensuring one over tube and one over lay reversal)	No damage to the sheath or to the core structure and no attenuation change throughout test
Impact	IEC 60794-1-21-E4	Weight: 1.5 kg Height: 1.0 m Anvil radius: 300 mm Impacts: 3	After 5 minutes no fibre breaks, no damage to the sheath or to the core structure and no attenuation change throughout test
Torsion	IEC 60794-1-21-E7	Sample length: 1 m Rotation: a) 180° clockwise, b) return to starting position, c) 180° anticlockwise, d) return to starting position. Four movements constitute one cycle). Complete 10 cycles (a to d) in one minute maximum	During the final tenth cycle at a), c) and after completion (no rotation) check transmitting fibres. No fibre breaks, no damage to the sheath or to the core structure and no attenuation change throughout test
Bend	IEC 60794-1-21-E11	Mandrel diameter: 30 x Cable OD Bend: 360° (1turn)	No attenuation change throughout test
Bend under tension	Concurrent to tensile test IEC 60794-1-21-E18A	Mandrel diameter: 60 x Cable OD Bend: 360° (1turn)	After 1 minute no fibre breaks, no damage to the sheath or to the core structure and no attenuation change from no load to full load
Temperature cycling	IEC 60794-1-22-F1	Sample length: 1000 m (minimum) Temperature range: – 10 °C to + 70 °C	There should be no average attenuation increase at the temperature extremes when compared to the attenuation at ambient temperature. No individual fibre should measure an attenuation greater than 0.15 dB/km
Water penetration	IEC 60794-1-22-F5B	Sample length = 3m, Water height = 1m	No water leakage after 24 hour

* All optical measurements for singlemode fibres performed at 1550 nm.

Logistic

Packing:

Timber drums to AS/NZS 2857 with NOLCO-FLEX protection. Steel drums are also provided upon request.

Delivery Lengths:

Standard delivery length is 4 km with a tolerance of - 1% / + 3%

NSW - Silverwater

Unit 4, 52 Holker Street
Silverwater NSW 2128

E: sales@opticalsolutions.com.au

P: +61 2 9395 1400

F: +61 2 9647 0014

NSW - Sydney City

Unit 10, 10 Bradford Street
Alexandria NSW 2015

E: sydcity@opticalsolutions.com.au

P: +61 2 9304 4555

F: +61 2 9700 8055

VIC

Unit 3 / 1 Rocklea Drive
Port Melbourne VIC 3207

E: vicsales@opticalsolutions.com.au

P: +61 3 9646 4166

F: +61 3 9646 4155

QLD

Unit 2/ 40 Borthwick Ave
Murarrie QLD 4172

E: qldsales@opticalsolutions.com.au

P: +61 7 3399 5280

F: +61 7 3399 9805

ACT

22 Isa Street
Fyshwick ACT 2609

E: actsales@opticalsolutions.com.au

P: +61 2 6162 4600

F: +61 2 6162 4605

WA

28a Teddington Rd
Burswood WA 6100

E: wasales@opticalsolutions.com.au

P: +61 8 9361 7000

F: +61 8 9361 7011