



MSTronic Co., Ltd.

2F, 12, Gongshang Rd., Wugu District, 248 New Taipei City, Taiwan

TEL:886-2-2293-0159 FAX:886-2-2292-8851

E.MAIL: mse@mse.com.tw

WEB: <http://www.mse.com.tw>

MIT-69N-1224BNNNH

DC/DC PoE Injector

SPECIFICATION

1. INPUT :

- 1.1 Input Voltage: 9Vdc to 36Vdc
- 1.2 Input Current: 2.05A at 12Vdc(2.86A at 9Vdc)
1.0A at 24Vdc(0.67A at 36Vdc)

2. OUTPUT :

2.1 Output Voltage & Current:

OUTPUT	+24V
Max. load	0.8A
Power	19.2W
Min. Load	0.01A
Load reg. %	5%
Line reg. %	1%
Ripple %	1%
Noise %	1%

TOTAL POWER : 19.2W

Note 1: Noise bandwidth is from DC to 20Mhz. Ripple & Noise is measured by
Paralleling a 0.1uF metalize capacitor on the test point.

3. EFFICIENCY : 75% min at Full Load , 12Vdc & 24Vdc Input Voltage

4. PROTECTION

4.1 Short Circuit Protection

Output Short GND Terminal will not damage the Power Supply and will
Auto-Reset.


4.2 Input with Fuse Protection.

4.3 Safety Standard: meet UL1950, CSA 22.2 & TUV EN60950.

4.4 EMC : meet FCC Class B , EN55032 Class B,

4.5 Over Current : 120% ~ 160% @12Vdc Input F.L

4.6 Input Pin & Reverse Protection-----NO Work

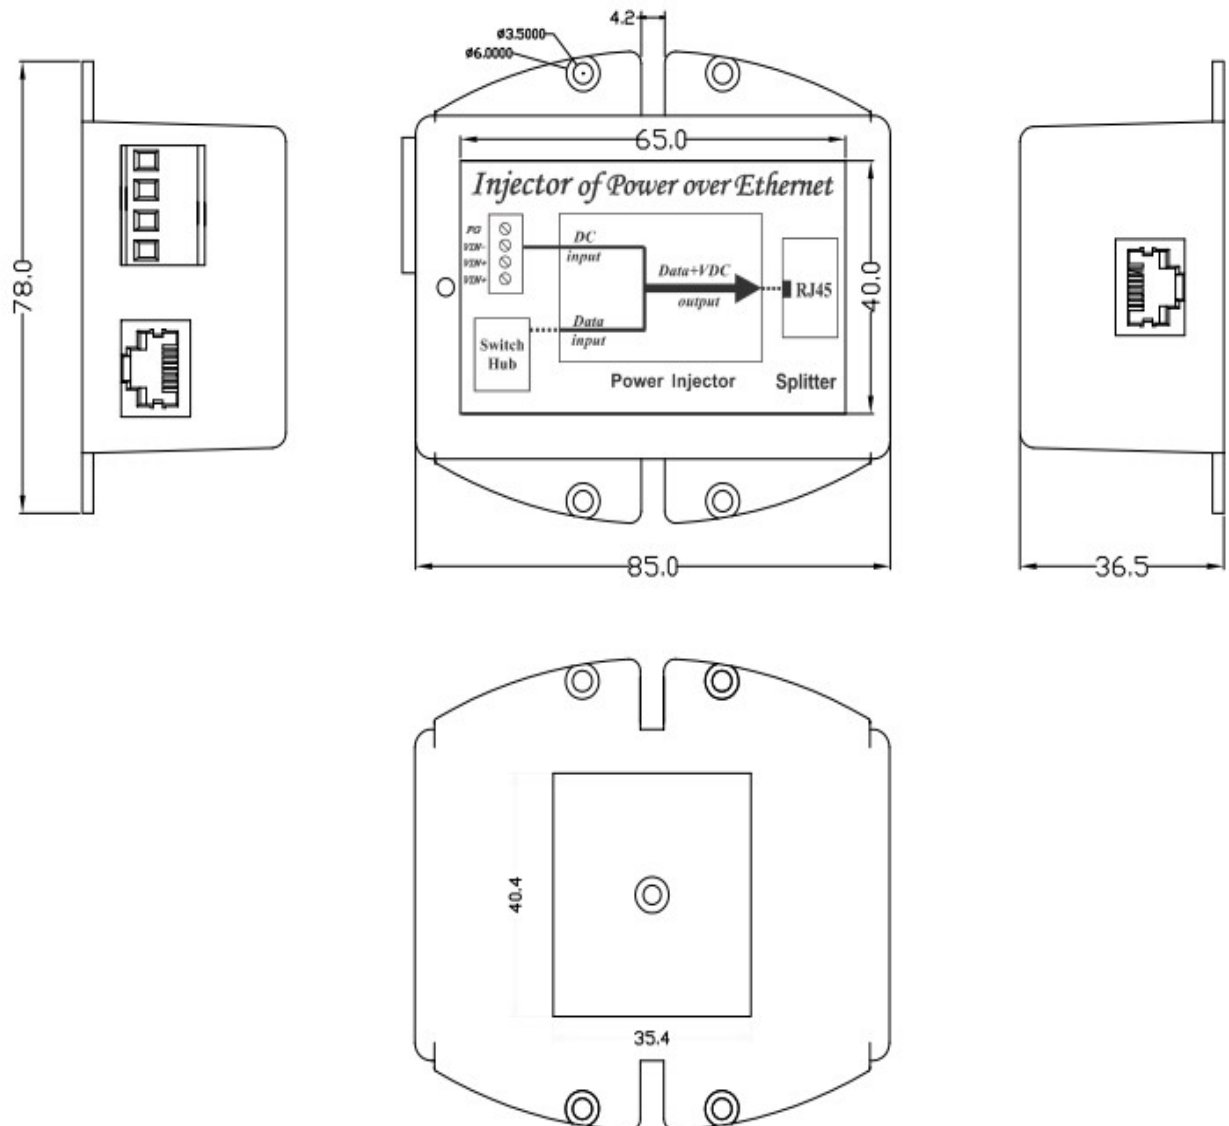



MSTronic Co., Ltd.

2F, 12, Gongshang Rd., Wugu District, 248 New Taipei City, Taiwan

TEL:886-2-2293-0159 FAX:886-2-2292-8851

E.MAIL: mse@mse.com.tw

WEB: <http://www.mse.com.tw>

MIT-69N-1224BNNNH

6. Indicator :

6.1 Output OK the LED will be “GREEN

7 CONNECTION:

RJ-45 Input (Data Only)			RJ-45 Output (Data & Power)	
Pin	Symbol	Description	Symbol	Description
1	RX+	Data Receive	RX+	Data Receive
2	RX-	Data Receive	RX-	Data Receive
3	TX+	Data Transmit	TX+	Data Transmit
4	NC	Not Connector	-Vdc	Feeding power(+)
5	NC	Not Connector	-Vdc	Feeding power(+)
6	TX-	Data Transmit	TX-	Data Transmit
7	NC	Not Connector	(-Vdc)_return +	Feeding power(-)
8	NC	Not Connector	(-Vdc)_return +	Feeding power(-)

Note : the model is isolated design, the output +/- or input +/- can be shorted to ground (FG).