


4f Compact Termination Box

OAsys®

The OAsys 4 Fibre Compact Termination Box is designed for use in both business and residential applications for termination of up to four fibres. The wall box enables the installation of either a single Sirocco Blown Tube cable using up to a 4 fibre blown fibre unit or two bi-fibre ruggedised cables to be spliced to four SC pigtails (UPC or APC) for connection to the optical network unit. The unit can be quickly installed within a residential, office or communication room environment.

The wall box can be supplied empty or with SC pigtails and adapters. It can also be supplied for used as a 2f Termination Box.

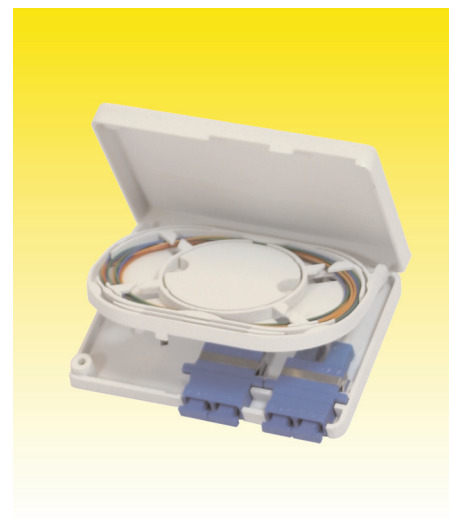

Features and Benefits

- Ability to allow cables to enter from rear or bottom.
- All fibres are positively managed to maintain a 30mm minimum bend radius.
- Optional Removable rear entry cable management.
- Flip tray to allow access to connectorised tails and cable entry
- Compact, low profile, wall mounted unit used for small and large business premises.
- Removable cover for easy access.
- Tamperproof cover security screws available as an option
- Unit manufactured from fire resistant UL94-V0 rated material.
- Patchcords exit unit on bottom face.
- For Internal use only.

Kit Contents

The OAsys 4 fibre compact termination box is supplied with all of the components required to complete the installation of one Blown Fibre input cable.

Additional Items –

See page 81

Optional

- Security Screw and tool
- Adapters
- Pigtails
- Patchcords

Characteristics

Maximum Capacity

Max. no. Fibres	4
No. Cable Ports	1
No. Customer Feeds	4

Dimensions (mm)

(h)80 x (w)120 x (d)25