

DATA SHEET



BENEFITS

INDUSTRY'S LOWEST COST ENTERPRISE CLASS 802.11AC SOLUTION

Unprecedented performance with extended range at the industry's most affordable price point

EXTENDED RANGE REQUIRES FEWER APS

Adaptive antenna technology delivers a 2x to 4x increase in Wi-Fi signal coverage minimizing the number of APs required to service any area

SLEEK, LOW PROFILE ENCLOSURE FOR EASE-OF-DEPLOYMENT

Aesthetically-pleasing design fits almost anywhere. Powerful 802.11ac technology that literally fits in the palm of your hand for easy deployment

CHANNEL SELECTION OPTIMIZES THROUGHPUT

ChannelFly dynamically chooses the best channel giving users the highest possible throughput even in highly congested environments

INTUITIVE CONFIGURATION AND MANAGEMENT

The industry's simplest configuration and management through a Web-based wizard and automated deployment capabilities

HASSLE FREE MIGRATION TO HIGHER SPEED WI-FI

Support for standard 802.3af power over Ethernet allows enterprises to use existing PoE switches without costly upgrades

ENTRY LEVEL 802.11AC 2X2:2 ACCESS POINT WITH ADAPTIVE ANTENNA TECHNOLOGY

The R310 delivers reliable 802.11ac wireless networking at the industry's most affordable price point.

Unlike any other 802.11ac wireless solution in its class, the R310 combines patented adaptive antenna technology and automatic interference mitigation to deliver consistent, predictable performance at extended ranges with up to 4dB of statistical BeamFlex gain and up to 10dB of interference mitigation.

Additional performance enhancements to signal gain can be attributed to the chip-based transmit beamforming capability adding 3dB when associated to a compatible client.

Each R310 integrates Ruckus-patented BeamFlex, a software-controlled, high gain antenna array that continually forms and directs each 802.11ac packet over the best performing signal path. The R310 automatically selects channels for highest throughput potential using Ruckus ChannelFly dynamic channel

PATENTED BEAMFLEX™ TECHNOLOGY EXTENDS SIGNAL RANGE, IMPROVES STABILITY OF CLIENT CONNECTIONS

All R310 Smart Wi-Fi access points integrate a software-controlled smart antenna array that delivers up to an additional 4 dB of BeamFlex gain and 10 dB of interference mitigation. This allows a 2 to 4x improvement in signal range and a reduction in packet loss from the ability to automatically mitigate interference and avoid obstacles.

ADVANCED WLAN APPLICATIONS

When used with the Ruckus ZoneDirector Smart WLAN controller, each R310 supports a wide range of value-added applications such as guest networking, Dynamic PSK, hotspot authentication, wireless intrusion detection and many more. WLANs can be created and mapped to the same or different APs or VLANs. In a centrally managed configuration, the R310 works with a wide range of authentication servers including Microsoft's Active Directory, LDAP, and RADIUS.

FLEXIBLE DEPLOYMENT OPTIONS

R310 APs can be deployed as a standalone AP or as part of a centrally managed wireless LAN using ZoneDirector and SmartZone controllers. R310 can be deployed across any L2/L3 network and can bridge traffic onto the local network, tunnel to a central location using L2TP or route between the WAN and NAT'ed private subnets. When used with the controller, each R310 is automatically configured through the network making deployment quick and easy.

COMPLETE LOCAL AND REMOTE MANAGEMENT

Each R310 can be managed as a standalone AP through a Web-based GUI, using SNMP or through the Ruckus FlexMaster Wi-Fi remote management system. Local management can also be performed using the ZoneDirector or SmartZone controller. FlexMaster is a LINUX-based software platform that uses industry-standard protocols to perform bulk configuration, fault detection, monitoring and a wide range of troubleshooting capabilities over a wire area connection. The controllers enable local management and control of APs, adding value-added services such as transmit power control, and guest networking.

FEATURES

WIRELESS

- Blazing fast 802.11ac speeds at the lowest cost in its class
- Dual-band concurrent (2.4GHz/5GHz) 802.11ac
- Adaptive antenna technology and advanced RF management
- Up to an additional 4dB BeamFlex gain / 10dB interference mitigation
- Automatic interference mitigation, optimized for high-density environments
- Integrated smart antenna technology
- 2 to 4 times extended range and coverage Standard 802.3af Power over Ethernet (PoE)
- Up to 8 BSSIDs per radio (16 BSSIDs per access point) with unique QoS and security policies
- Advanced QoS packet classification and automatic priority for latency-sensitive traffic
- Bandsteering and airtime fairness
- Dynamic, per-user rate-limiting for hotspot WLANs
- WPA-PSK (AES), 802.1X support for RADIUS and Active Directory**

ACCESSORIES

- Wall, desktop or ceiling mountable





SOFTWARE

- Router mode with NAT and DHCP services
- IP multicast video streaming support
- Ethernet 802.1x port-based authentication (authenticator and supplicant)
- Zero-IT and Dynamic PSK**
- Admission control/load balancing**
- Captive portal and guest accounts **
- Guest access services**
- Application Recognition and Control**
- Limited lifetime warranty

** when used with Ruckus ZoneDirector or SmartZone controllers.

SMALL LIGHTWEIGHT FORM FACTOR WITH BUILT IN MOUNTING OPTIONS FOR EASY DEPLOYMENT

The R310 installs & mounts seamlessly, making it ideal for quick and effective set up for carrier & enterprise deployments.

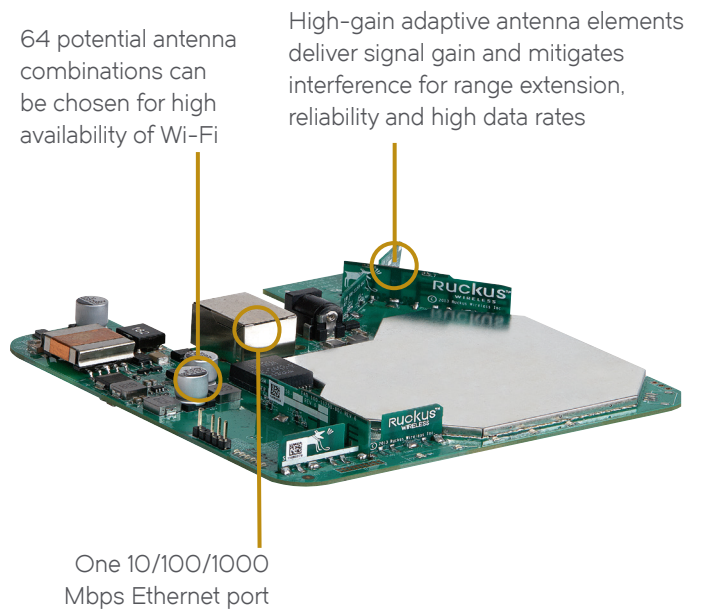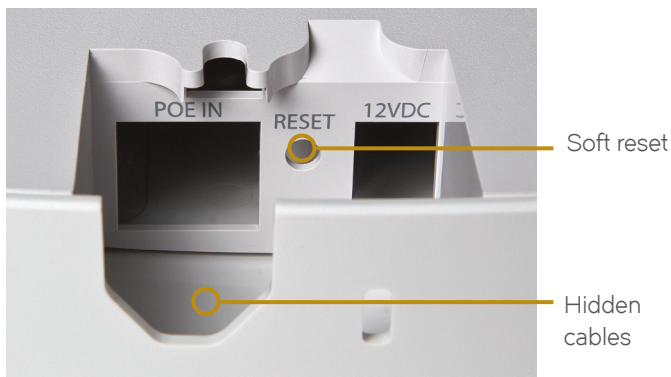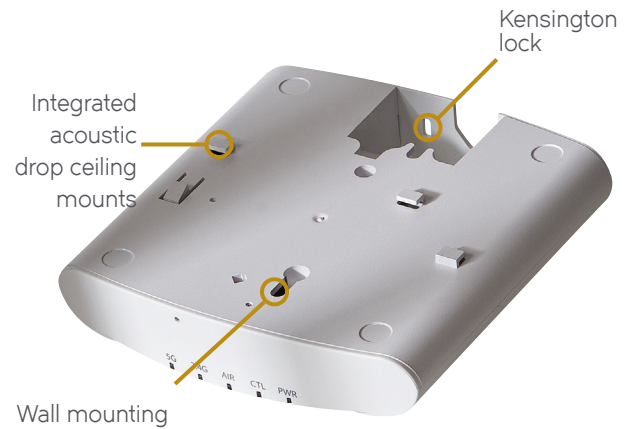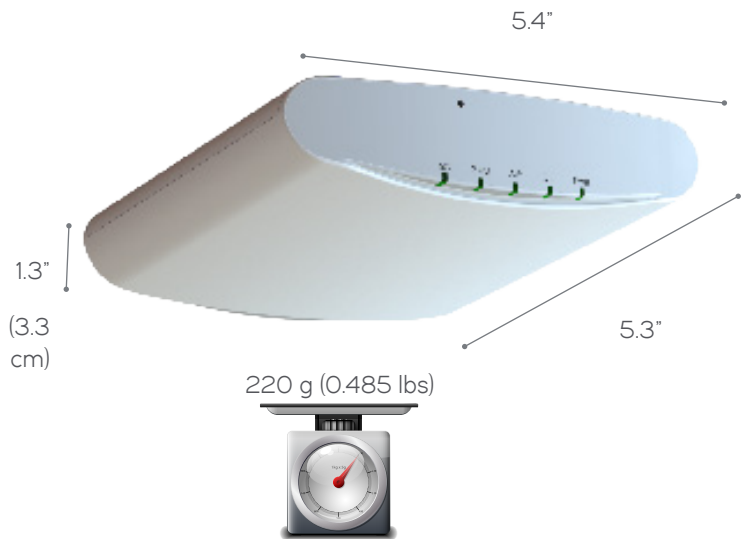

R310 Access Point

Indoor 802.11ac 2x2:2 Wi-Fi Access Point

DATA SHEET

PHYSICAL CHARACTERISTICS	
Power	<ul style="list-style-type: none">DC Input: 12 VDC 1.0APower over Ethernet 802.3 af
Physical Size	<ul style="list-style-type: none">13.8cm (L), 13.5cm (W), 3.3cm (H)5.4 in (L), 5.3 in (W), 1.3 in (H)
Weight	<ul style="list-style-type: none">220 gms (0.485 lbs)
Ethernet Ports	<ul style="list-style-type: none">1 auto MDX, auto-sensing 10/100/1000Mbps, RJ-45, POE port
Lock Options	<ul style="list-style-type: none">Hidden latching mechanismKensington Lock HoleT-bar Torx
Environmental Conditions	<ul style="list-style-type: none">Operating Temperature: 0°C - 40°COperating Humidity: 10% - 95% non-condensing
Power Draw	<div>DC Input<ul style="list-style-type: none">Idle: 6WTypical: 7.1WPeak: 9W<div>Power over Ethernet Input<ul style="list-style-type: none">Idle: 6WTypical: 7.8WPeak: 11W</div></div>

PERFORMANCE AND CAPACITY	
Max Phy Rate	<ul style="list-style-type: none">300 Mbps (2.4GHz)867 Mbps (5GHz)
Concurrent Stations	<ul style="list-style-type: none">100 clients per AP
Simultaneous VoIP Clients	<ul style="list-style-type: none">30

RF	
ANTENNA	<ul style="list-style-type: none">Adaptive antenna that provides up to 128 unique antenna patterns64 patterns per band
RF POWER OUTPUT (Aggregated)	<ul style="list-style-type: none">23dBm for 2.4GHz*24dBm for 5GHz*
PHYSICAL ANTENNA GAIN	<ul style="list-style-type: none">Up to 3dBi per spatial stream
BEAMFLEX* SINR TX GAIN	<ul style="list-style-type: none">Up to 4dB
INTERFERENCE MITIGATION	<ul style="list-style-type: none">Up to 10dB
MINIMUM RX SENSITIVITY	<ul style="list-style-type: none">Up to -99dBm

*BeamFlex gains are statistical system level effects translated to enhanced SINR based on observations over time in real-world conditions with multiple APs and many clients

MANAGEMENT	
Deployment Options	<ul style="list-style-type: none">Standalone (individually managed)Managed by ZoneDirector*Managed by FlexMaster*Managed by SmartZone
Configuration	<ul style="list-style-type: none">Web User Interface (HTTP/S)CLI (Telnet/SSH), SNMP v1, 2, 3TR-069 vis FlexMaster
Auto Ap Software Updates	<ul style="list-style-type: none">FTP or TFTP, remote auto available

NOTE: SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE
* some features not supported - e.g., mesh

WI-FI	
Standards	<ul style="list-style-type: none">IEEE 802.11a/b/g/n/ac2.4GHz and 5GHz
Supported Data Rates	<ul style="list-style-type: none">802.11n/ac: 6.5Mbps - 173.4Mbps (20MHz) 13.5Mbps - 400Mbps (40MHz), 29.3Mbps - 867Mbps (80MHz)802.11a: 54, 48, 36, 24, 18, 12, 9 and 6Mbps802.11b: 11, 5.5, 2 and 1 Mbps802.11g: 54, 48, 36, 24, 18, 12, 9 and 6 Mbps
Radio Chains	<ul style="list-style-type: none">2 x 2
Spatial Streams	<ul style="list-style-type: none">2
Channelization	<ul style="list-style-type: none">20MHz, 40MHz, 80MHz
Operating Channels	<ul style="list-style-type: none">US/Canada: 1-11, Europe (ETSI X30): 1-13, Japan X41: 1-135 GHz channels: Country dependent
Frequency Band	<ul style="list-style-type: none">IEEE 802.11 b/g/n: 2.4 - 2.484 GHzIEEE 802.11a/ac: 5.15 - 5.25 GHz; 5.25 - 5.35 GHz; 5.47 - 5.725 GHz; 5.725 - 5.85 GHz
Bssid	<ul style="list-style-type: none">Up to 8 per radio (16 per AP)
POWER SAVE	<ul style="list-style-type: none">Supported
Wireless Security	<ul style="list-style-type: none">WPA-PSK, WPA-TKIP, WPA2 AES, 802.1liAuthentication via 802.1X with the ZoneDirector or SmartZone, local authentication database, support for RADIUS, LDAP, and ActiveDirectory
Certifications**	<ul style="list-style-type: none">U.S., Europe, Argentina, Australia, Brazil, Canada, Chile, China, Colombia, Costa Rica, Ecuador, Egypt, Hong Kong, India, Indonesia, Israel, Japan, Jordan, Kenya, Korea, Malaysia, Mexico, New Zealand, Peru, Philippines, Russia, Saudi Arabia, Singapore, South Africa, Taiwan, Thailand, UAE, VietnamWEEE/RoHS2 complianceEN 60601-1-2 (Medical)Wi-Fi AllianceIndustry CanadaEU/EFTACB Scheme CertificateEN 50121-1 Railway EMCEN 50121-4 Railway ImmunityIEC 61373 Railway Shock & VibrationUL 2043 Plenum Rated

* Maximum power varies by country

** For current certification status please see price list

PRODUCT ORDERING INFORMATION

MODEL	DESCRIPTION
R310 Wi-Fi 802.11ac Access Point	
901-R310-XX02	Concurrent dual band 802.11ac AP, no power adapter
Optional Accessories	
902-0120-0000	<ul style="list-style-type: none">Universal secure mounting bracket fits multiple AP's including R310. Mounts to Hard Wall, Ceiling, Pole & Truss. Fits without pad-lock support.
902-0173-XX10	<ul style="list-style-type: none">Power Adapter, AC/DC wall plug, 100-250Vac 50/60Hz
902-0162-XXYY	<ul style="list-style-type: none">PoE Adapter

PLEASE NOTE: When ordering Indoor APs, you must specify the destination region by indicating -US, -WW, or -Z2 instead of XX. When ordering PoE injectors or power supplies, you must specify the destination region by indicating -US, -EU, -AU, -BR, -CN, -IN, -JP, -KR, -SA, -UK, or -UN instead of -XX.

For access points, -Z2 applies to the following countries: Algeria, Egypt, Israel, Morocco, Tunisia, and Vietnam

Warranty: Sold with a limited lifetime warranty.
For details see: <http://support.ruckuswireless.com/warranty>

Copyright © 2017, Ruckus Wireless, Inc. All rights reserved. Ruckus Wireless and Ruckus Wireless design are registered in the U.S. Patent and Trademark Office. Ruckus Wireless, the Ruckus Wireless logo, BeamFlex+, MediaFlex, FlexMaster, ZoneDirector, SpeedFlex, SmartCast, SmartCell, ChannelFly and Dynamic PSK are trademarks of Ruckus Wireless, Inc. in the United States and other countries. All other trademarks mentioned in this document or website are the property of their respective owners.
17-07-A

Ruckus Wireless, Inc. | 350 West Java Drive | Sunnyvale, CA 94089 USA | T: (650) 265-4200 | F: (408) 738-2065
ruckuswireless.com

