Product Specifications





T-DUX-125 | 620370-000

TDUX - Inflatable Duct Seal, size 125

- Flexible and reliable wraparound inflatable sealing system for cables
- Fast and easy to install or remove, even when water is flowing out of the duct
- Independent of duct or cable ovality
- Water and airtight up to 50 kPa (7 psi)
- Environmentaly friendly, non-toxic and resistant to chemicals

Body Features

Body Material

Inflatable bladder with incorporated sealing mechanism

Dimensions


Inner Duct diameter, minimum	110.0 mm 4.3 in
Cable Diameter (Max)	103.0 mm 4.1 in
Cable Diameter (Min)	83.0 mm 3.3 in
Inner Duct Diameter, maximum	125.0 mm 4.9 in
Length	567.00 mm 22.32 in
Width	120.000 mm 4.724 in

Other

Comment

When sealing more than two cables in a duct, seperate orderable TDUX-CL clips are to be used

Outline Drawing

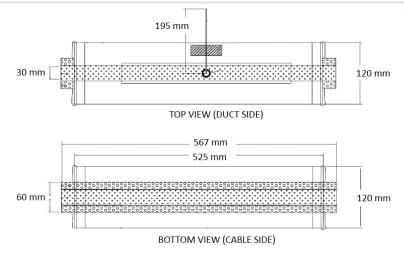

Packaging Features

Packaging Quantity

10

Product Availability

©2017 CommScope, Inc. All rights reserved. All trademarks identified by ® or ™ are registered trademarks, respectively, of CommScope. All specifications are subject to change without notice. See www.commscope.com for the most current information. Revised: May 19, 2017

Product Specifications



T-DUX-125 | 620370-000

Region

Latin America | North America

Product Type Features

Due du et Turre Du et (
Product Type Duct :	Seal
System TDUX	

Usage Conditions

Installation Temperature Range -5 - 40 °C

Regulatory Compliance/Certifications

Agency RoHS 2011/65/EU Classification