Product Specifications





T-DUX-35 | 896761-000

TDUX - Inflatable Duct Seal, size 1

- Flexible and reliable wraparound inflatable sealing system for cables
- Fast and easy to install or remove, even when water is flowing out of the duct
- · Independent of duct or cable ovality
- Water and airtight up to 50 kPa (7 psi)
- Environmentaly friendly, non-toxic and resistant to chemicals

Body Features

Body Material

Inflatable bladder with incorporated sealing mechanism

Dimensions


| Inner Duct diameter, minimum | 25.0 mm 1.0 in |
|------------------------------|-----------------------|
| Cable Diameter (Max) | 25.0 mm 1.0 in |
| Cable Diameter (Min) | 12.0 mm 0.5 in |
| Inner Duct Diameter, maximum | 35.0 mm 1.4 in |
| Length | 155.00 mm 6.10 in |
| Width | 120.000 mm 4.724 in |

Other

Comment

When sealing more than two cables in a duct, seperate orderable TDUX-CL clips are to be used

Outline Drawing

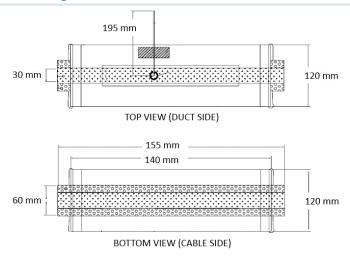

Packaging Features

Packaging Quantity

10

Product Availability

Product Specifications



T-DUX-35 | 896761-000

Region Latin America | North America

Product Type Features

Product Type Duct Seal System TDUX

Usage Conditions

Installation Temperature Range -5 - 40 °C

Regulatory Compliance/Certifications

Agency Classification

RoHS 2011/65/EU